


PROGRESSIVES STEEL

Unilateral Tolerance
 GO - Plus Tolerance
 NO GO - Minus Tolerance
 CHROME PLATED - ADD 30%

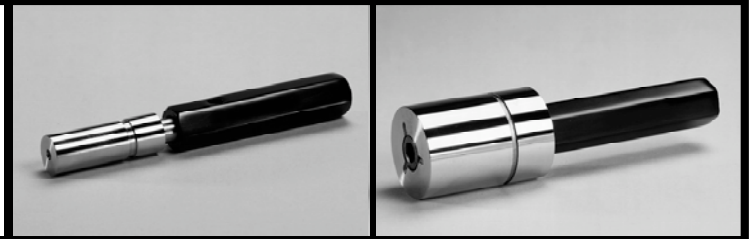

SIZE — RANGE	CLASS	TOLERANCE INCHES	AGD PROGRESSIVE MEMBER			QUANTITIES			HANDLE	
			MEMBER LENGTH	GO PORTION	NO GO PORTION	1	2-4	5-10	NO.	PRICE
TAPERLOCK STYLE .105 in to .150 in. 2.67mm to 3.81 mm	XX	.00002				72.00	67.00	64.00	00	10.00
	X	.00004	² / ₃₂ in.	³ / ₁₆ in.	⁷ / ₃₂ in.	59.00	56.00	52.00		
	Y	.00007	18.3 mm	9.5 mm	5.6 mm	50.00	46.00	44.00		
	Z	.00010				42.00	40.00	38.00		
.1501 in. to .230 in. 3.81 mm to 5.84 mm	XX	.00002				66.00	63.00	60.00	0	10.00
	X	.00004	¹ / ₁₆ in.	¹ / ₈ in.	³ / ₁₆ in.	56.00	52.00	50.00		
	Y	.00007	20.6 mm	10.3 mm	7.1 mm	49.00	45.00	43.00		
	Z	.00010				38.00	36.00	34.00		
.2301 in. to .365 in. 5.84 mm to 9.27 mm	XX	.00002				71.00	65.00	63.00	1	10.00
	X	.00004	¹ / ₁₆ in.	³ / ₁₆ in.	⁵ / ₁₆ in.	58.00	55.00	51.00		
	Y	.00007	30.2 mm	19.1 mm	7.9 mm	50.00	46.00	44.00		
	Z	.00010				40.00	38.00	36.00		
.3651 in. to .510 in. 9.27 mm to 12.95 mm	XX	.00002				76.00	71.00	67.00	2	10.00
	X	.00004	¹ / ₂ in.	1 in.	³ / ₈ in.	61.00	58.00	55.00		
	Y	.00007	38.1 mm	25.4 mm	9.5 mm	54.00	50.00	48.00		
	Z	.00010				42.00	40.00	38.00		
.5101 in. to .825 in. 12.95 mm to 20.96 mm	XX	.00002				79.00	75.00	70.00	3	10.00
	X	.00004	¹ / ₂ in.	¹ / ₂ in.	¹ / ₂ in.	63.00	60.00	57.00		
	Y	.00007	47.6 mm	31.8 mm	12.7 mm	57.00	54.00	50.00		
	Z	.00010				44.00	42.00	40.00		
.8251 in. to 1.135 in. 20.96 mm to 28.83 mm	XX	.00003				92.00	87.00	83.00	4	11.00
	X	.00006	² / ₁₆ in.	¹ / ₂ in.	³ / ₈ in.	71.00	66.00	63.00		
	Y	.00009	54.0 mm	34.9 mm	15.9 mm	59.00	56.00	52.00		
	Z	.00012				51.00	48.00	45.00		
1.1351 in. to 1.510 in. 28.83 mm to 38.35 mm	XX	.00003				100.00	94.00	89.00	5	11.00
	X	.00006	² / ₁₆ in.	¹ / ₂ in.	³ / ₈ in.	89.00	84.00	80.00		
	Y	.00009	60.3 mm	38.1 mm	19.1 mm	71.00	66.00	63.00		
	Z	.00012				60.00	57.00	54.00		
TRILOCK STYLE 1.5101 in. to 2.010 in. 38.35 mm to 51.05 mm	XX	.00004				148.00	141.00	132.00	5½	16.00
	X	.00008	² / ₁₆ in.	¹ / ₂ in.	³ / ₈ in.	119.00	111.00	106.00		
	Y	.00012	73.0 mm	47.6 mm	22.2 mm	104.00	99.00	93.00		
	Z	.00016				84.00	80.00	76.00		
2.0101 in. to 2.510 in. 51.05 mm to 63.75 mm	XX	.00004				186.00	175.00	167.00	6	17.00
	X	.00008	3 in.	2 in.	³ / ₈ in.	150.00	143.00	134.00		
	Y	.00012	76.2 mm	50.8 mm	22.2 mm	127.00	121.00	114.00		
	Z	.00016				105.00	100.00	94.00		
2.5101 in. to 3.010 in. 63.75 mm to 76.45 mm	XX	.00005				212.00	201.00	190.00	7	18.00
	X	.00010	3 in.	2 in.	³ / ₈ in.	173.00	165.00	155.00		
	Y	.00015	76.2 mm	50.8 mm	22.2 mm	149.00	142.00	133.00		
	Z	.00020				123.00	117.00	109.00		
3.0101 in. to 3.510 in. 76.45 mm to 89.15 mm	XX	.00005				251.00	237.00	226.00	7	18.00
	X	.00010	3 in.	2 in.	³ / ₈ in.	193.00	184.00	173.00		
	Y	.00015	76.2 mm	50.8 mm	22.2 mm	172.00	164.00	154.00		
	Z	.00020				144.00	136.00	129.00		
3.5101 in. to 4.010 in. 89.15 mm to 101.85 mm	XX	.00005				292.00	276.00	261.00	7	18.00
	X	.00010	³ / ₁₆ in.	² / ₁₆ in.	³ / ₈ in.	236.00	225.00	212.00		
	Y	.00015	79.4 mm	54.0 mm	22.2 mm	203.00	191.00	182.00		
	Z	.00020				170.00	162.00	152.00		
4.0101 in. to 4.510 in. 101.85 mm to 114.55 mm	XX	.00005				331.00	315.00	298.00	7	18.00
	X	.00010	³ / ₁₆ in.	² / ₁₆ in.	³ / ₈ in.	266.00	252.00	238.00		
	Y	.00015	79.4 mm	54.0 mm	22.2 mm	231.00	218.00	208.00		
	Z	.00020				190.00	181.00	170.00		